




# 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00  $H_{ft}^{1.607}$  GPM = 14362  $H_{ft}^{1.607}$  MGD = 20.68  $H_{ft}^{1.607}$   
 Formulas (H in meters): L/S = 6115  $H_m^{1.607}$  M3/HR = 22010  $H_m^{1.607}$

| FEET | INCHES | METERS | CFS   | GPM  | MGD   | L/S   | M3/HR |
|------|--------|--------|-------|------|-------|-------|-------|
| 0.01 | 0.12   | 0.0030 |       |      |       |       |       |
| 0.02 | 0.24   | 0.0061 |       |      |       |       |       |
| 0.03 | 0.36   | 0.0091 |       |      |       |       |       |
| 0.04 | 0.48   | 0.0122 |       |      |       |       |       |
| 0.05 | 0.60   | 0.0152 |       |      |       |       |       |
| 0.06 | 0.72   | 0.0183 |       |      |       |       |       |
| 0.07 | 0.84   | 0.0213 |       |      |       |       |       |
| 0.08 | 0.96   | 0.0244 |       |      |       |       |       |
| 0.09 | 1.08   | 0.0274 |       |      |       |       |       |
| 0.10 | 1.20   | 0.0305 |       |      |       |       |       |
| 0.11 | 1.32   | 0.0335 |       |      |       |       |       |
| 0.12 | 1.44   | 0.0366 |       |      |       |       |       |
| 0.13 | 1.56   | 0.0396 |       |      |       |       |       |
| 0.14 | 1.68   | 0.0427 |       |      |       |       |       |
| 0.15 | 1.80   | 0.0457 |       |      |       |       |       |
| 0.16 | 1.92   | 0.0488 |       |      |       |       |       |
| 0.17 | 2.04   | 0.0518 |       |      |       |       |       |
| 0.18 | 2.16   | 0.0549 |       |      |       |       |       |
| 0.19 | 2.28   | 0.0579 |       |      |       |       |       |
| 0.20 | 2.40   | 0.0610 |       |      |       |       |       |
| 0.21 | 2.52   | 0.0640 |       |      |       |       |       |
| 0.22 | 2.64   | 0.0671 |       |      |       |       |       |
| 0.23 | 2.76   | 0.0701 |       |      |       |       |       |
| 0.24 | 2.88   | 0.0732 |       |      |       |       |       |
| 0.25 | 3.00   | 0.0762 | 3.449 | 1548 | 2.229 | 97.66 | 351.4 |
| 0.26 | 3.12   | 0.0792 | 3.673 | 1648 | 2.374 | 104.0 | 374.3 |
| 0.27 | 3.24   | 0.0823 | 3.903 | 1751 | 2.522 | 110.5 | 397.7 |
| 0.28 | 3.36   | 0.0853 | 4.137 | 1857 | 2.674 | 117.2 | 421.6 |
| 0.29 | 3.48   | 0.0884 | 4.377 | 1965 | 2.829 | 124.0 | 446.1 |
| 0.30 | 3.60   | 0.0914 | 4.623 | 2075 | 2.988 | 130.9 | 471.0 |

Excessive error due to fluid-flow properties and boundary conditions

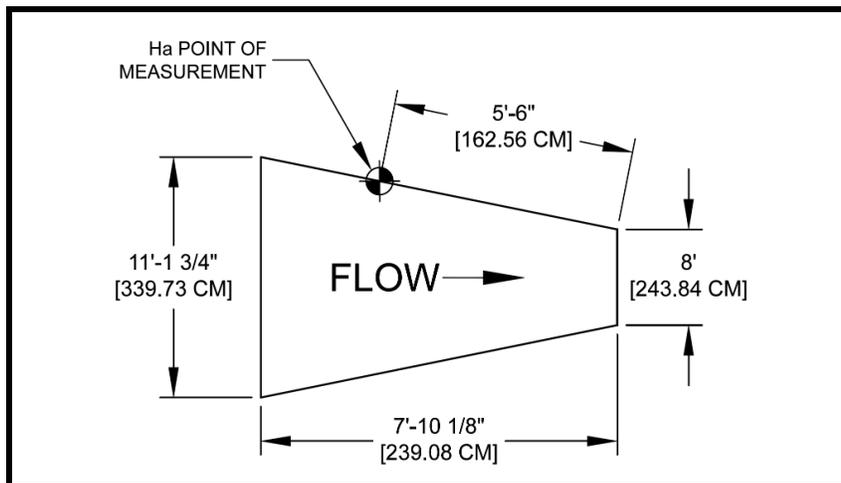

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume



## 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00 H<sub>ft.</sub><sup>1.607</sup> GPM = 14362 H<sub>ft.</sub><sup>1.607</sup> MGD = 20.68 H<sub>ft.</sub><sup>1.607</sup>  
 Formulas (H in meters): L/S = 6115 H<sub>m</sub><sup>1.607</sup> M3/HR = 22010 H<sub>m</sub><sup>1.607</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD   | L/S   | M3/HR |
|------|--------|--------|-------|-------|-------|-------|-------|
| 0.31 | 3.72   | 0.0945 | 4.873 | 2187  | 3.149 | 138.0 | 496.5 |
| 0.32 | 3.84   | 0.0975 | 5.128 | 2301  | 3.314 | 145.2 | 522.5 |
| 0.33 | 3.96   | 0.1006 | 5.388 | 2418  | 3.482 | 152.6 | 549.0 |
| 0.34 | 4.08   | 0.1036 | 5.652 | 2537  | 3.653 | 160.1 | 576.0 |
| 0.35 | 4.20   | 0.1067 | 5.922 | 2658  | 3.827 | 167.7 | 603.5 |
| 0.36 | 4.32   | 0.1097 | 6.196 | 2781  | 4.005 | 175.5 | 631.4 |
| 0.37 | 4.44   | 0.1128 | 6.475 | 2906  | 4.185 | 183.4 | 659.8 |
| 0.38 | 4.56   | 0.1158 | 6.759 | 3033  | 4.368 | 191.4 | 688.7 |
| 0.39 | 4.68   | 0.1189 | 7.047 | 3163  | 4.554 | 199.6 | 718.1 |
| 0.40 | 4.80   | 0.1219 | 7.339 | 3294  | 4.743 | 207.9 | 747.9 |
| 0.41 | 4.92   | 0.1250 | 7.636 | 3427  | 4.935 | 216.3 | 778.2 |
| 0.42 | 5.04   | 0.1280 | 7.938 | 3563  | 5.130 | 224.8 | 808.9 |
| 0.43 | 5.16   | 0.1311 | 8.244 | 3700  | 5.328 | 233.5 | 840.1 |
| 0.44 | 5.28   | 0.1341 | 8.554 | 3839  | 5.529 | 242.3 | 871.7 |
| 0.45 | 5.40   | 0.1372 | 8.869 | 3980  | 5.732 | 251.2 | 903.7 |
| 0.46 | 5.52   | 0.1402 | 9.188 | 4123  | 5.938 | 260.2 | 936.2 |
| 0.47 | 5.64   | 0.1433 | 9.511 | 4268  | 6.147 | 269.3 | 969.1 |
| 0.48 | 5.76   | 0.1463 | 9.838 | 4415  | 6.358 | 278.6 | 1002  |
| 0.49 | 5.88   | 0.1494 | 10.17 | 4564  | 6.572 | 288.0 | 1036  |
| 0.50 | 6.00   | 0.1524 | 10.50 | 4715  | 6.789 | 297.5 | 1070  |
| 0.51 | 6.12   | 0.1554 | 10.84 | 4867  | 7.009 | 307.1 | 1105  |
| 0.52 | 6.24   | 0.1585 | 11.19 | 5021  | 7.231 | 316.9 | 1140  |
| 0.53 | 6.36   | 0.1615 | 11.54 | 5177  | 7.456 | 326.7 | 1176  |
| 0.54 | 6.48   | 0.1646 | 11.89 | 5335  | 7.683 | 336.7 | 1211  |
| 0.55 | 6.60   | 0.1676 | 12.24 | 5495  | 7.913 | 346.7 | 1248  |
| 0.56 | 6.72   | 0.1707 | 12.60 | 5656  | 8.146 | 356.9 | 1284  |
| 0.57 | 6.84   | 0.1737 | 12.97 | 5820  | 8.381 | 367.2 | 1321  |
| 0.58 | 6.96   | 0.1768 | 13.33 | 5985  | 8.618 | 377.6 | 1359  |
| 0.59 | 7.08   | 0.1798 | 13.71 | 6151  | 8.858 | 388.2 | 1397  |
| 0.60 | 7.20   | 0.1829 | 14.08 | 6320  | 9.101 | 398.8 | 1435  |
| 0.61 | 7.32   | 0.1859 | 14.46 | 6490  | 9.346 | 409.5 | 1473  |
| 0.62 | 7.44   | 0.1890 | 14.84 | 6662  | 9.593 | 420.4 | 1513  |
| 0.63 | 7.56   | 0.1920 | 15.23 | 6835  | 9.843 | 431.3 | 1552  |
| 0.64 | 7.68   | 0.1951 | 15.62 | 7010  | 10.10 | 442.4 | 1592  |
| 0.65 | 7.80   | 0.1981 | 16.01 | 7187  | 10.35 | 453.5 | 1632  |
| 0.66 | 7.92   | 0.2012 | 16.41 | 7366  | 10.61 | 464.8 | 1672  |
| 0.67 | 8.04   | 0.2042 | 16.81 | 7546  | 10.87 | 476.2 | 1713  |
| 0.68 | 8.16   | 0.2073 | 17.22 | 7728  | 11.13 | 487.6 | 1755  |
| 0.69 | 8.28   | 0.2103 | 17.63 | 7911  | 11.39 | 499.2 | 1796  |
| 0.70 | 8.40   | 0.2134 | 18.04 | 8096  | 11.66 | 510.9 | 1838  |
| 0.71 | 8.52   | 0.2164 | 18.46 | 8283  | 11.93 | 522.7 | 1881  |
| 0.72 | 8.64   | 0.2195 | 18.87 | 8471  | 12.20 | 534.5 | 1923  |
| 0.73 | 8.76   | 0.2225 | 19.30 | 8661  | 12.47 | 546.5 | 1966  |
| 0.74 | 8.88   | 0.2256 | 19.72 | 8852  | 12.75 | 558.6 | 2010  |
| 0.75 | 9.00   | 0.2286 | 20.15 | 9045  | 13.03 | 570.8 | 2054  |
| 0.76 | 9.12   | 0.2316 | 20.59 | 9240  | 13.31 | 583.1 | 2098  |
| 0.77 | 9.24   | 0.2347 | 21.03 | 9436  | 13.59 | 595.4 | 2142  |
| 0.78 | 9.36   | 0.2377 | 21.47 | 9634  | 13.87 | 607.9 | 2187  |
| 0.79 | 9.48   | 0.2408 | 21.91 | 9833  | 14.16 | 620.5 | 2233  |
| 0.80 | 9.60   | 0.2438 | 22.36 | 10034 | 14.45 | 633.2 | 2278  |

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume



## 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00 H<sub>ft</sub><sup>1.607</sup> GPM = 14362 H<sub>ft</sub><sup>1.607</sup> MGD = 20.68 H<sub>ft</sub><sup>1.607</sup>  
 Formulas (H in meters): L/S = 6115 H<sub>m</sub><sup>1.607</sup> M3/HR = 22010 H<sub>m</sub><sup>1.607</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD   | L/S   | M3/HR |
|------|--------|--------|-------|-------|-------|-------|-------|
| 0.81 | 9.72   | 0.2469 | 22.81 | 10236 | 14.74 | 645.9 | 2324  |
| 0.82 | 9.84   | 0.2499 | 23.26 | 10440 | 15.03 | 658.8 | 2370  |
| 0.83 | 9.96   | 0.2530 | 23.72 | 10645 | 15.33 | 671.7 | 2417  |
| 0.84 | 10.08  | 0.2560 | 24.18 | 10852 | 15.63 | 684.8 | 2464  |
| 0.85 | 10.20  | 0.2591 | 24.64 | 11061 | 15.93 | 697.9 | 2511  |
| 0.86 | 10.32  | 0.2621 | 25.11 | 11270 | 16.23 | 711.2 | 2559  |
| 0.87 | 10.44  | 0.2652 | 25.58 | 11482 | 16.53 | 724.5 | 2607  |
| 0.88 | 10.56  | 0.2682 | 26.06 | 11695 | 16.84 | 737.9 | 2655  |
| 0.89 | 10.68  | 0.2713 | 26.54 | 11909 | 17.15 | 751.5 | 2704  |
| 0.90 | 10.80  | 0.2743 | 27.02 | 12125 | 17.46 | 765.1 | 2753  |
| 0.91 | 10.92  | 0.2774 | 27.50 | 12342 | 17.77 | 778.8 | 2802  |
| 0.92 | 11.04  | 0.2804 | 27.99 | 12561 | 18.09 | 792.6 | 2852  |
| 0.93 | 11.16  | 0.2835 | 28.48 | 12781 | 18.41 | 806.5 | 2902  |
| 0.94 | 11.28  | 0.2865 | 28.97 | 13002 | 18.72 | 820.5 | 2952  |
| 0.95 | 11.40  | 0.2896 | 29.47 | 13225 | 19.05 | 834.5 | 3003  |
| 0.96 | 11.52  | 0.2926 | 29.97 | 13450 | 19.37 | 848.7 | 3054  |
| 0.97 | 11.64  | 0.2957 | 30.47 | 13676 | 19.69 | 862.9 | 3105  |
| 0.98 | 11.76  | 0.2987 | 30.98 | 13903 | 20.02 | 877.3 | 3157  |
| 0.99 | 11.88  | 0.3018 | 31.49 | 14132 | 20.35 | 891.7 | 3209  |
| 1.00 | 12.00  | 0.3048 | 32.00 | 14362 | 20.68 | 906.2 | 3261  |
| 1.01 | 12.12  | 0.3078 | 32.52 | 14593 | 21.01 | 920.8 | 3313  |
| 1.02 | 12.24  | 0.3109 | 33.03 | 14826 | 21.35 | 935.5 | 3366  |
| 1.03 | 12.36  | 0.3139 | 33.56 | 15060 | 21.69 | 950.3 | 3419  |
| 1.04 | 12.48  | 0.3170 | 34.08 | 15296 | 22.03 | 965.2 | 3473  |
| 1.05 | 12.60  | 0.3200 | 34.61 | 15533 | 22.37 | 980.2 | 3527  |
| 1.06 | 12.72  | 0.3231 | 35.14 | 15771 | 22.71 | 995.2 | 3581  |
| 1.07 | 12.84  | 0.3261 | 35.68 | 16011 | 23.06 | 1010  | 3635  |
| 1.08 | 12.96  | 0.3292 | 36.21 | 16252 | 23.40 | 1026  | 3690  |
| 1.09 | 13.08  | 0.3322 | 36.75 | 16495 | 23.75 | 1041  | 3745  |
| 1.10 | 13.20  | 0.3353 | 37.30 | 16739 | 24.10 | 1056  | 3801  |
| 1.11 | 13.32  | 0.3383 | 37.84 | 16984 | 24.46 | 1072  | 3856  |
| 1.12 | 13.44  | 0.3414 | 38.39 | 17230 | 24.81 | 1087  | 3912  |
| 1.13 | 13.56  | 0.3444 | 38.94 | 17478 | 25.17 | 1103  | 3968  |
| 1.14 | 13.68  | 0.3475 | 39.50 | 17728 | 25.53 | 1119  | 4025  |
| 1.15 | 13.80  | 0.3505 | 40.06 | 17978 | 25.89 | 1134  | 4082  |
| 1.16 | 13.92  | 0.3536 | 40.62 | 18230 | 26.25 | 1150  | 4139  |
| 1.17 | 14.04  | 0.3566 | 41.18 | 18483 | 26.62 | 1166  | 4197  |
| 1.18 | 14.16  | 0.3597 | 41.75 | 18738 | 26.98 | 1182  | 4254  |
| 1.19 | 14.28  | 0.3627 | 42.32 | 18994 | 27.35 | 1199  | 4312  |
| 1.20 | 14.40  | 0.3658 | 42.89 | 19251 | 27.72 | 1215  | 4371  |
| 1.21 | 14.52  | 0.3688 | 43.47 | 19509 | 28.09 | 1231  | 4430  |
| 1.22 | 14.64  | 0.3719 | 44.05 | 19769 | 28.47 | 1247  | 4489  |
| 1.23 | 14.76  | 0.3749 | 44.63 | 20030 | 28.84 | 1264  | 4548  |
| 1.24 | 14.88  | 0.3780 | 45.21 | 20292 | 29.22 | 1280  | 4607  |
| 1.25 | 15.00  | 0.3810 | 45.80 | 20556 | 29.60 | 1297  | 4667  |
| 1.26 | 15.12  | 0.3840 | 46.39 | 20821 | 29.98 | 1314  | 4727  |
| 1.27 | 15.24  | 0.3871 | 46.99 | 21087 | 30.37 | 1331  | 4788  |
| 1.28 | 15.36  | 0.3901 | 47.58 | 21354 | 30.75 | 1348  | 4849  |
| 1.29 | 15.48  | 0.3932 | 48.18 | 21623 | 31.14 | 1364  | 4910  |
| 1.30 | 15.60  | 0.3962 | 48.78 | 21893 | 31.53 | 1381  | 4971  |

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume



# 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00 H<sub>ft</sub><sup>1.607</sup> GPM = 14362 H<sub>ft</sub><sup>1.607</sup> MGD = 20.68 H<sub>ft</sub><sup>1.607</sup>  
 Formulas (H in meters): L/S = 6115 H<sub>m</sub><sup>1.607</sup> M3/HR = 22010 H<sub>m</sub><sup>1.607</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD   | L/S  | M3/HR |
|------|--------|--------|-------|-------|-------|------|-------|
| 1.31 | 15.72  | 0.3993 | 49.39 | 22164 | 31.92 | 1399 | 5032  |
| 1.32 | 15.84  | 0.4023 | 49.99 | 22437 | 32.31 | 1416 | 5094  |
| 1.33 | 15.96  | 0.4054 | 50.60 | 22711 | 32.70 | 1433 | 5156  |
| 1.34 | 16.08  | 0.4084 | 51.22 | 22986 | 33.10 | 1450 | 5219  |
| 1.35 | 16.20  | 0.4115 | 51.83 | 23262 | 33.50 | 1468 | 5282  |
| 1.36 | 16.32  | 0.4145 | 52.45 | 23540 | 33.90 | 1485 | 5345  |
| 1.37 | 16.44  | 0.4176 | 53.07 | 23818 | 34.30 | 1503 | 5408  |
| 1.38 | 16.56  | 0.4206 | 53.70 | 24098 | 34.70 | 1521 | 5472  |
| 1.39 | 16.68  | 0.4237 | 54.32 | 24380 | 35.11 | 1538 | 5535  |
| 1.40 | 16.80  | 0.4267 | 54.95 | 24662 | 35.52 | 1556 | 5600  |
| 1.41 | 16.92  | 0.4298 | 55.58 | 24946 | 35.92 | 1574 | 5664  |
| 1.42 | 17.04  | 0.4328 | 56.22 | 25231 | 36.33 | 1592 | 5729  |
| 1.43 | 17.16  | 0.4359 | 56.86 | 25517 | 36.75 | 1610 | 5794  |
| 1.44 | 17.28  | 0.4389 | 57.50 | 25804 | 37.16 | 1628 | 5859  |
| 1.45 | 17.40  | 0.4420 | 58.14 | 26093 | 37.58 | 1646 | 5924  |
| 1.46 | 17.52  | 0.4450 | 58.78 | 26383 | 37.99 | 1665 | 5990  |
| 1.47 | 17.64  | 0.4481 | 59.43 | 26674 | 38.41 | 1683 | 6056  |
| 1.48 | 17.76  | 0.4511 | 60.08 | 26966 | 38.83 | 1702 | 6123  |
| 1.49 | 17.88  | 0.4542 | 60.74 | 27259 | 39.25 | 1720 | 6189  |
| 1.50 | 18.00  | 0.4572 | 61.39 | 27554 | 39.68 | 1739 | 6256  |
| 1.51 | 18.12  | 0.4602 | 62.05 | 27850 | 40.11 | 1757 | 6323  |
| 1.52 | 18.24  | 0.4633 | 62.72 | 28147 | 40.53 | 1776 | 6391  |
| 1.53 | 18.36  | 0.4663 | 63.38 | 28445 | 40.96 | 1795 | 6458  |
| 1.54 | 18.48  | 0.4694 | 64.05 | 28744 | 41.39 | 1814 | 6526  |
| 1.55 | 18.60  | 0.4724 | 64.72 | 29045 | 41.83 | 1833 | 6595  |
| 1.56 | 18.72  | 0.4755 | 65.39 | 29346 | 42.26 | 1852 | 6663  |
| 1.57 | 18.84  | 0.4785 | 66.06 | 29649 | 42.70 | 1871 | 6732  |
| 1.58 | 18.96  | 0.4816 | 66.74 | 29953 | 43.13 | 1890 | 6801  |
| 1.59 | 19.08  | 0.4846 | 67.42 | 30259 | 43.57 | 1909 | 6870  |
| 1.60 | 19.20  | 0.4877 | 68.10 | 30565 | 44.02 | 1929 | 6940  |
| 1.61 | 19.32  | 0.4907 | 68.79 | 30873 | 44.46 | 1948 | 7010  |
| 1.62 | 19.44  | 0.4938 | 69.48 | 31181 | 44.90 | 1968 | 7080  |
| 1.63 | 19.56  | 0.4968 | 70.17 | 31491 | 45.35 | 1987 | 7150  |
| 1.64 | 19.68  | 0.4999 | 70.86 | 31802 | 45.80 | 2007 | 7221  |
| 1.65 | 19.80  | 0.5029 | 71.56 | 32114 | 46.25 | 2026 | 7292  |
| 1.66 | 19.92  | 0.5060 | 72.25 | 32428 | 46.70 | 2046 | 7363  |
| 1.67 | 20.04  | 0.5090 | 72.96 | 32742 | 47.15 | 2066 | 7434  |
| 1.68 | 20.16  | 0.5121 | 73.66 | 33058 | 47.61 | 2086 | 7506  |
| 1.69 | 20.28  | 0.5151 | 74.36 | 33375 | 48.06 | 2106 | 7578  |
| 1.70 | 20.40  | 0.5182 | 75.07 | 33693 | 48.52 | 2126 | 7650  |
| 1.71 | 20.52  | 0.5212 | 75.78 | 34012 | 48.98 | 2146 | 7722  |
| 1.72 | 20.64  | 0.5243 | 76.50 | 34332 | 49.44 | 2166 | 7795  |
| 1.73 | 20.76  | 0.5273 | 77.21 | 34653 | 49.90 | 2187 | 7868  |
| 1.74 | 20.88  | 0.5304 | 77.93 | 34976 | 50.37 | 2207 | 7941  |
| 1.75 | 21.00  | 0.5334 | 78.65 | 35299 | 50.83 | 2227 | 8015  |
| 1.76 | 21.12  | 0.5364 | 79.38 | 35624 | 51.30 | 2248 | 8088  |
| 1.77 | 21.24  | 0.5395 | 80.10 | 35950 | 51.77 | 2268 | 8162  |
| 1.78 | 21.36  | 0.5425 | 80.83 | 36277 | 52.24 | 2289 | 8237  |
| 1.79 | 21.48  | 0.5456 | 81.56 | 36605 | 52.71 | 2310 | 8311  |
| 1.80 | 21.60  | 0.5486 | 82.29 | 36934 | 53.19 | 2331 | 8386  |

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume



# 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00 H<sub>ft.</sub><sup>1.607</sup> GPM = 14362 H<sub>ft.</sub><sup>1.607</sup> MGD = 20.68 H<sub>ft.</sub><sup>1.607</sup>  
 Formulas (H in meters): L/S = 6115 H<sub>m</sub><sup>1.607</sup> M3/HR = 22010 H<sub>m</sub><sup>1.607</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD   | L/S  | M3/HR |
|------|--------|--------|-------|-------|-------|------|-------|
| 1.81 | 21.72  | 0.5517 | 83.03 | 37264 | 53.66 | 2351 | 8461  |
| 1.82 | 21.84  | 0.5547 | 83.77 | 37596 | 54.14 | 2372 | 8536  |
| 1.83 | 21.96  | 0.5578 | 84.51 | 37928 | 54.62 | 2393 | 8612  |
| 1.84 | 22.08  | 0.5608 | 85.25 | 38262 | 55.10 | 2414 | 8687  |
| 1.85 | 22.20  | 0.5639 | 86.00 | 38596 | 55.58 | 2436 | 8763  |
| 1.86 | 22.32  | 0.5669 | 86.75 | 38932 | 56.06 | 2457 | 8840  |
| 1.87 | 22.44  | 0.5700 | 87.50 | 39269 | 56.55 | 2478 | 8916  |
| 1.88 | 22.56  | 0.5730 | 88.25 | 39607 | 57.04 | 2499 | 8993  |
| 1.89 | 22.68  | 0.5761 | 89.01 | 39946 | 57.53 | 2521 | 9070  |
| 1.90 | 22.80  | 0.5791 | 89.76 | 40287 | 58.02 | 2542 | 9147  |
| 1.91 | 22.92  | 0.5822 | 90.53 | 40628 | 58.51 | 2564 | 9225  |
| 1.92 | 23.04  | 0.5852 | 91.29 | 40970 | 59.00 | 2585 | 9302  |
| 1.93 | 23.16  | 0.5883 | 92.05 | 41314 | 59.49 | 2607 | 9380  |
| 1.94 | 23.28  | 0.5913 | 92.82 | 41658 | 59.99 | 2629 | 9458  |
| 1.95 | 23.40  | 0.5944 | 93.59 | 42004 | 60.49 | 2651 | 9537  |
| 1.96 | 23.52  | 0.5974 | 94.36 | 42350 | 60.99 | 2672 | 9616  |
| 1.97 | 23.64  | 0.6005 | 95.14 | 42698 | 61.49 | 2694 | 9695  |
| 1.98 | 23.76  | 0.6035 | 95.92 | 43047 | 61.99 | 2716 | 9774  |
| 1.99 | 23.88  | 0.6066 | 96.70 | 43397 | 62.49 | 2738 | 9853  |
| 2.00 | 24.00  | 0.6096 | 97.48 | 43748 | 63.00 | 2761 | 9933  |
| 2.01 | 24.12  | 0.6126 | 98.26 | 44100 | 63.51 | 2783 | 10013 |
| 2.02 | 24.24  | 0.6157 | 99.05 | 44453 | 64.02 | 2805 | 10093 |
| 2.03 | 24.36  | 0.6187 | 99.84 | 44807 | 64.53 | 2827 | 10173 |
| 2.04 | 24.48  | 0.6218 | 100.6 | 45163 | 65.04 | 2850 | 10254 |
| 2.05 | 24.60  | 0.6248 | 101.4 | 45519 | 65.55 | 2872 | 10335 |
| 2.06 | 24.72  | 0.6279 | 102.2 | 45876 | 66.06 | 2895 | 10416 |
| 2.07 | 24.84  | 0.6309 | 103.0 | 46235 | 66.58 | 2917 | 10498 |
| 2.08 | 24.96  | 0.6340 | 103.8 | 46594 | 67.10 | 2940 | 10579 |
| 2.09 | 25.08  | 0.6370 | 104.6 | 46955 | 67.62 | 2963 | 10661 |
| 2.10 | 25.20  | 0.6401 | 105.4 | 47316 | 68.14 | 2986 | 10743 |
| 2.11 | 25.32  | 0.6431 | 106.2 | 47679 | 68.66 | 3009 | 10825 |
| 2.12 | 25.44  | 0.6462 | 107.0 | 48042 | 69.18 | 3032 | 10908 |
| 2.13 | 25.56  | 0.6492 | 107.9 | 48407 | 69.71 | 3055 | 10991 |
| 2.14 | 25.68  | 0.6523 | 108.7 | 48773 | 70.24 | 3078 | 11074 |
| 2.15 | 25.80  | 0.6553 | 109.5 | 49140 | 70.76 | 3101 | 11157 |
| 2.16 | 25.92  | 0.6584 | 110.3 | 49507 | 71.29 | 3124 | 11241 |
| 2.17 | 26.04  | 0.6614 | 111.1 | 49876 | 71.82 | 3147 | 11324 |
| 2.18 | 26.16  | 0.6645 | 112.0 | 50246 | 72.36 | 3171 | 11408 |
| 2.19 | 26.28  | 0.6675 | 112.8 | 50617 | 72.89 | 3194 | 11493 |
| 2.20 | 26.40  | 0.6706 | 113.6 | 50989 | 73.43 | 3217 | 11577 |
| 2.21 | 26.52  | 0.6736 | 114.4 | 51362 | 73.96 | 3241 | 11662 |
| 2.22 | 26.64  | 0.6767 | 115.3 | 51736 | 74.50 | 3265 | 11747 |
| 2.23 | 26.76  | 0.6797 | 116.1 | 52111 | 75.04 | 3288 | 11832 |
| 2.24 | 26.88  | 0.6828 | 116.9 | 52487 | 75.58 | 3312 | 11917 |
| 2.25 | 27.00  | 0.6858 | 117.8 | 52864 | 76.13 | 3336 | 12003 |
| 2.26 | 27.12  | 0.6888 | 118.6 | 53242 | 76.67 | 3360 | 12089 |
| 2.27 | 27.24  | 0.6919 | 119.5 | 53621 | 77.22 | 3384 | 12175 |
| 2.28 | 27.36  | 0.6949 | 120.3 | 54001 | 77.77 | 3408 | 12261 |
| 2.29 | 27.48  | 0.6980 | 121.2 | 54382 | 78.31 | 3432 | 12348 |
| 2.30 | 27.60  | 0.7010 | 122.0 | 54765 | 78.86 | 3456 | 12434 |

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume



## 96-Inch Montana Flume Discharge Table

No Submergence ±3-5% Accuracy

Formulas (H in feet): CFS = 32.00 H<sub>ft.</sub><sup>1.607</sup> GPM = 14362 H<sub>ft.</sub><sup>1.607</sup> MGD = 20.68 H<sub>ft.</sub><sup>1.607</sup>  
 Formulas (H in meters): L/S = 6115 H<sub>m</sub><sup>1.607</sup> M3/HR = 22010 H<sub>m</sub><sup>1.607</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD   | L/S  | M3/HR |
|------|--------|--------|-------|-------|-------|------|-------|
| 2.31 | 27.72  | 0.7041 | 122.9 | 55148 | 79.42 | 3480 | 12521 |
| 2.32 | 27.84  | 0.7071 | 123.7 | 55532 | 79.97 | 3504 | 12608 |
| 2.33 | 27.96  | 0.7102 | 124.6 | 55917 | 80.52 | 3528 | 12696 |
| 2.34 | 28.08  | 0.7132 | 125.5 | 56303 | 81.08 | 3553 | 12784 |
| 2.35 | 28.20  | 0.7163 | 126.3 | 56690 | 81.64 | 3577 | 12872 |
| 2.36 | 28.32  | 0.7193 | 127.2 | 57078 | 82.20 | 3602 | 12960 |
| 2.37 | 28.44  | 0.7224 | 128.0 | 57468 | 82.76 | 3626 | 13048 |
| 2.38 | 28.56  | 0.7254 | 128.9 | 57858 | 83.32 | 3651 | 13137 |
| 2.39 | 28.68  | 0.7285 | 129.8 | 58249 | 83.88 | 3676 | 13225 |
| 2.40 | 28.80  | 0.7315 | 130.7 | 58641 | 84.45 | 3700 | 13314 |
| 2.41 | 28.92  | 0.7346 | 131.5 | 59034 | 85.01 | 3725 | 13404 |
| 2.42 | 29.04  | 0.7376 | 132.4 | 59428 | 85.58 | 3750 | 13493 |
| 2.43 | 29.16  | 0.7407 | 133.3 | 59824 | 86.15 | 3775 | 13583 |
| 2.44 | 29.28  | 0.7437 | 134.2 | 60220 | 86.72 | 3800 | 13673 |
| 2.45 | 29.40  | 0.7468 | 135.1 | 60617 | 87.29 | 3825 | 13763 |
| 2.46 | 29.52  | 0.7498 | 136.0 | 61015 | 87.87 | 3850 | 13853 |
| 2.47 | 29.64  | 0.7529 | 136.8 | 61414 | 88.44 | 3875 | 13944 |
| 2.48 | 29.76  | 0.7559 | 137.7 | 61814 | 89.02 | 3901 | 14035 |
| 2.49 | 29.88  | 0.7590 | 138.6 | 62215 | 89.59 | 3926 | 14126 |
| 2.50 | 30.00  | 0.7620 | 139.5 | 62617 | 90.17 | 3951 | 14217 |

Sources: [Water Measurement Manual](#), 3rd Edition, United States Department of the Interior, Bureau of Reclamation  
 ASTM D 1941-91 (2007): Standard Test Method for Open Channel Flow Measurement of Water with Parshall Flume