

Openchannelflow provides customization options for all our shelter components and accessories.

STANDARD EQUIPMENT

Each **Openchannelflow** shelter is specified with a long list of standard equipment.

We've take our decades of experience in designing and manufacturing fiberglass shelters and equipped our units with those features most requested by our customers.

For many of our customers, our **standard equipment** package meets all of their needs:

Electrical

- Pre-wired with stranded 12 gauge THHN in rigid PVC conduit
- 125 A main lug load center
- 20A GFCI outlet with weather cover
- Exterior switches for independent control of light and fan

HVAC



- 585 CFM exhaust fan with screened hood
- 10" x 10" fiberglass intake shutter with screened hood
- 1,500 watt line powered heater with thermostat

Lighting

- Dust-tight, wet location 4-foot LED interior ceiling light

Mounting

- Internal mounting flange

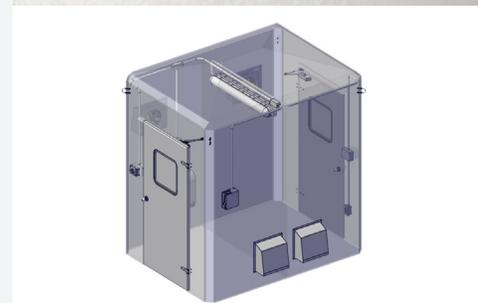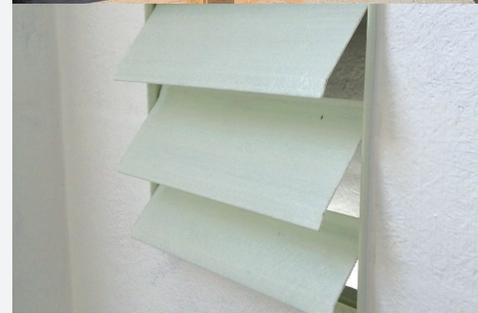

CUSTOMIZATION

While each **Openchannelflow** shelter comes with a long list of standard equipment accessories, we also understand there is no one-size-fits all solution.

GET STARTED

Let's bring your Shelter project to life.

→ [SUBMIT ONLINE REQUEST](#)

CALL 855.481.1118